



ZODIAC

RE/L

L electric heater

The



- The easiest to use
- Simple to install
- Mechanical thermostat
- Especially adapted to above ground pools



	RE/LE 3	RE/LE 6	RE/LE 9	RE/LE 12
Standard model	W40LE03	W40LE06	W40LE09	W40LE12

Technical specifications	RE/LE 3	RE/LE 6	RE/LE 9	RE/LE 12
Maximum volume m ³ *	20	40	60	80
Thermo-plunger power (kW)**	3	6	9	12
Absorbed intensity Tri 400 V (A)***	5	9	13	18
Power cable cross section tri 400 V (mm ²)****	5 x 2,5	5 x 2,5	5 x 4	5 x 4
Absorbed intensity Single ph. 230 V (A)***	14	27	40	-
Power cable cross section Single 230 V (mm ²)****	3 x 4	3 x 6	3 x 10	-
Min flow	5 m ³ / hr			
Max flow	20 m ³ / hr			
Hydraulic connection	PVC Ø 50 or Ø 63			
Weight (kg)	4	4	5	5

* Private open air pool, temperate climate, with isothermal cover, from May 15 to September 15.

** Manufacturing tolerance + or - 5%

*** Operating power tolerance + 6 - 10% EDF network power supply.

**** For a maximum length of 25 metres.




RE/L




INSTALLATION

- In line connection using two unions
PVC Ø 63 + reducers Ø 63-50.
- Any circulation direction: just turn the body in the direction of the water flow.
- Simplified mono 230 V / Tri 400 V coupling (tri 230 on request).
RED LINE 12 always 3 phase 400 V.
- Electric power supply by a 30 mA ground fault circuit breaker (not supplied).

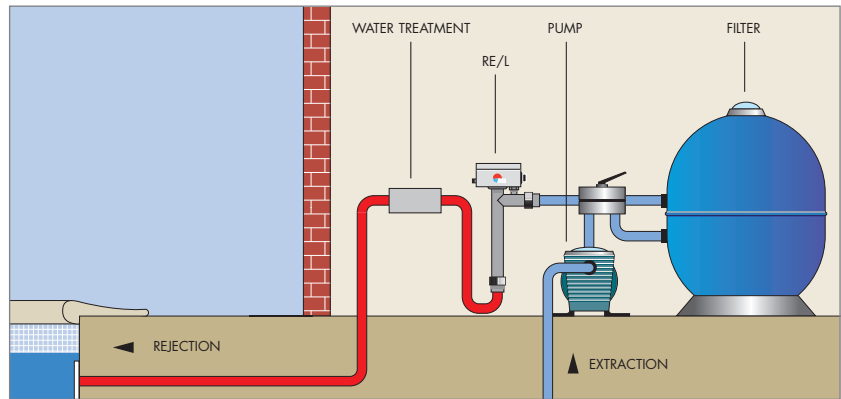


SIZES (in mm)

3 and 6 kW

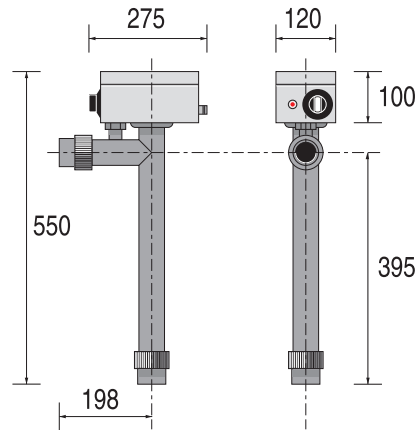

9 and 12 kW

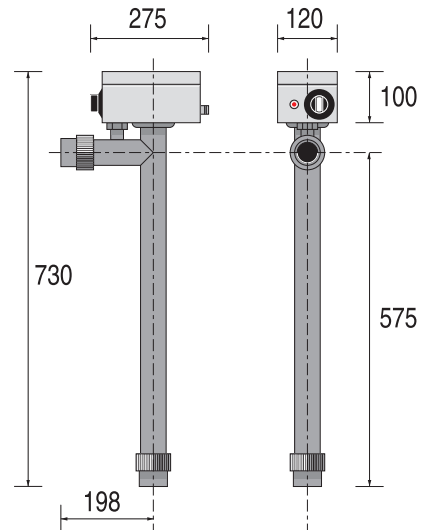

DESCRIPTION

