



[illegible]

Sirocco 55-80-110 single-phase

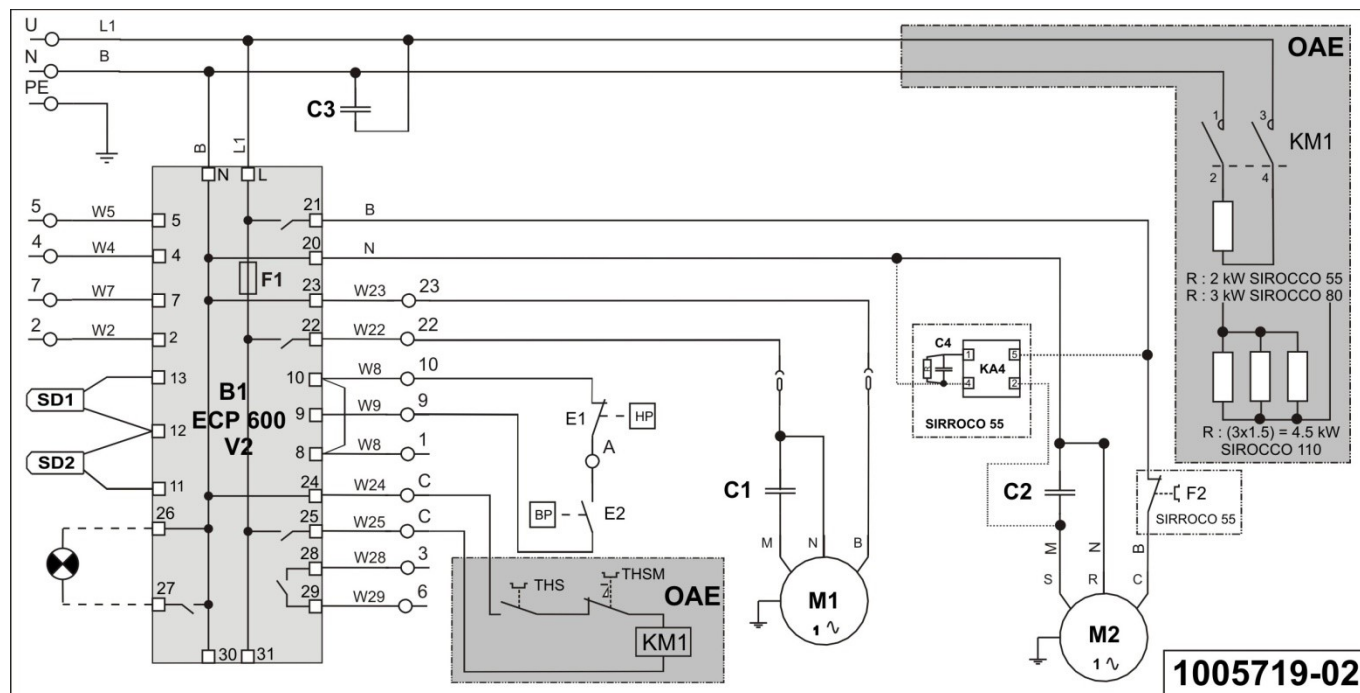

Sirocco 110 three-phase

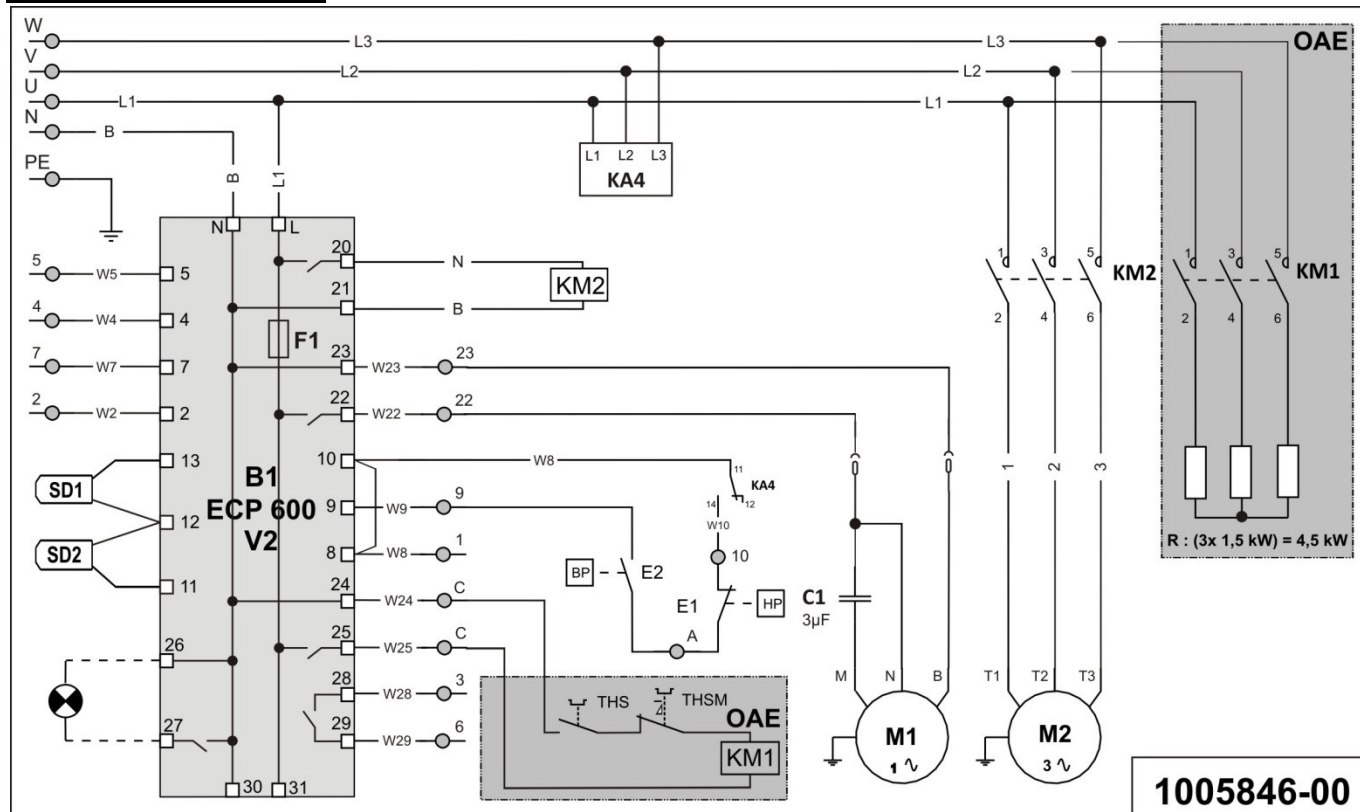

U-N	single phase main supply 230Vac-1N-50Hz
U-V-W-N	three phase main supply 400Vac-3N-50Hz
PE (⏏)	Earth
3-6	control of heating for ZPCE type boiler or an existing heating system
C-C	supply (230Vac-50Hz) for battery circulator or used for electric logic of the heating option by electric backing
5-7-2-4-1	connection of Hygro Control (see §2.6.5)
26-27	supply (230 V AC -50 Hz) for remote fault warning light or relaying
B1	command logic controller ECP 600
C1	ventilator capacitor
C2	compressor capacitor
C3	filtering capacitor
C4	starting relay capacitor
E1	high pressure switch
E2	low pressure switch
F1	Fuse T=6.3A – 5 x 20
F2	Compressor internal thermal protection
KA4	starting relay or phase order relay on Sirocco three phase
KM1	power contactor of back up heating resistor
KM2	compressor power contactor
M1	ventilator motor (230Vac/50Hz)
M2	compressor motor (230Vac/50Hz)
OAE	back up heating option
R	heating resistor
SD1	air inlet sensor (black sheath)
SD2	defrost sensor (grey sheath)
THS	high limit thermostat (automatic reset)
THSM	positive high limit thermostat (manual reset)
N	black
B	blue
M	brown

Dimensions

without option

	Weight (Kg)	A	B	C
	Kg	mm		
Sirocco 55	65	1030	620	653
Sirocco 80	75	1220	810	843
Sirocco 110	85	1410	1000	1033