



Floor slot diffusers

Dehumidification > Floor Slot diffusers

- + Attractive and discreet design : perfect integration flush with the level of the floor
- + Ideal air supply distribution : solution specially adapted for bay windows (air supply along the bay window)
- + New products, new heights, and new kits to make installation easier




Height (mm)	S08-1	S10-1	S12-1	S16-2	S20-2	S24-2	S30-3
100-150	WD001422	WD001424	WD001426	WD001429	WD001431	WD001433	WD001435
150-200	WD001423	WD001425	WD001427	WD001430	WD001432	WD001434	WD001436

*The height corresponds to that between the concrete slab and the finished level. It must not be less than 10 cm.

Floor slot diffusers can be cut straight across or at a 45° angle to the desired length (within dimension limits).
Floor slot diffusers are provided with any Zodiac dehumidifier unit order.
Contact our Design Office (BE@zodiac.com) for design and quotation.

TECHNICAL SPECIFICATIONS

The slot diffuser selection (number of slots) depends on the airflow and on the length of the diffuser.


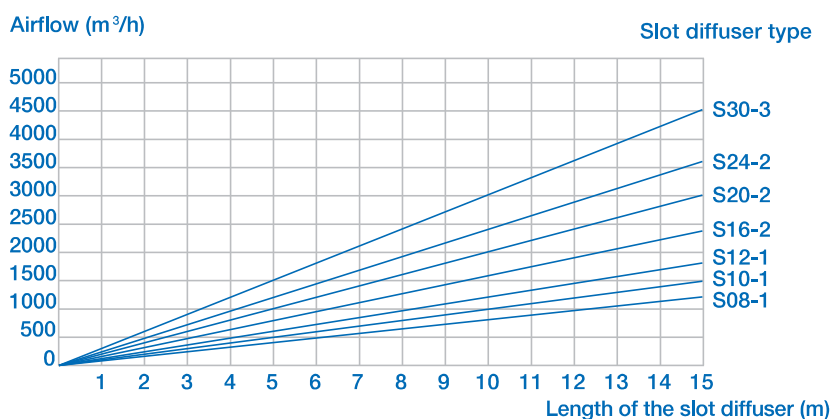


Type and quantity of tapping to order for each metre of floor slot diffuser

Type of floor slot diffuser	S08-1	S10-1	S12-1	S16-2	S20-2	S24-2	S30-3
Tapping/linear metre	2xD100	2xD100	2xD100	3xD100 or 2xD125	3xD100 or 2xD125	2xD160	2xD160

DIMENSIONS (EN MM)

	A	B	C	D	H
S08-1	8	18	109	149	2 possible heights: • 100 to 150 mm • 150 to 200 mm
S10-1	10	20	111	151	
S12-1	12	22	113	153	
S16-2	8	34	125	165	
S20-2	10	38	129	169	
S24-2	12	42	133	173	
S30-3	10	56	147	187	

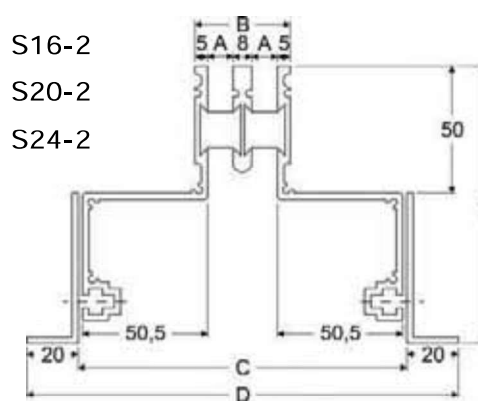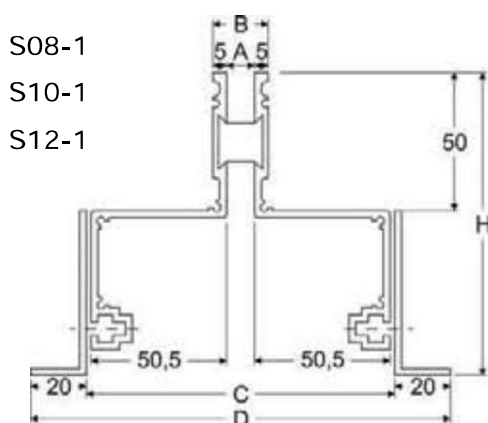

INSTALLATION

Example with a hollow block floor

